

Installation Kabelverschraubung M25x1,5 Grau IP68 -5bar (small)



EAN CODE



Thread Type: Metric M25 x 1,5 according to EN60423

Material Data: Halogen-free Nylon PA 66 (Flammability UL 94V-2) for A.C.E.F parts. (Contact us for Flammability V0 material)

Standard in weather-resistant EPDM rubbers for B.D parts. (NBR rubber is optional for oil-resistance applications)

Our black cable glands are suitable for outdoor use have been subjected to UV light exposure and water immersion same as UL746C (f1) rating.


UV (Irradiance 340 nm) exposure is performed by using a xenon-arc weatherometer for 1000 hours and intermittent exposure to water spray

IP Protection: IP68 -5bar, Cable diameter 4 - 6mm

Working Temp: - 40 °C to 105 °C (- 40 °F to 221 °F). Short-Term to 160 °C (320 °F).

Color: RAL9005 Black

Weitere Bilder

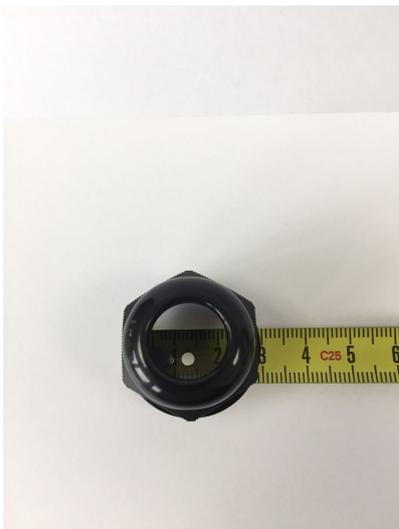

Zubehör

Art.-Nr.	Name
----------	------
