

MATERIAL LIST:

⑨	S/N barcode label	1pcs	
⑧	LC Dust Cap white	16pcs	
⑦	Fanout Splitter with heat shrink tube	2pcs	
⑥	Fanout cable OD 2.0mm Erika violet	16pcs	
⑤	Ring 1 2 3 4 5 6 7 8	16pcs	
④	LC White 2.0 Boot	16pcs	
③	LC MM Simplex Connector With Clip Erika violet	16pcs	
②	LC/UPC MM Ferrule	16pcs	
①	Universal Fiber Optical Cable 8C OM4 50/125 LSZH 6.0mm Black, CPR Dca	L	
NO.		QT' Y	REMARK

Note:
1. ROHS 3.0 and REACH Compliant
2. Test:


Test Grade Designation:Each to Reference		
Grade IL/RL	Standard	
Insertion Loss (IL)	≤0.3dB	IEC 61300-3-4
Return Loss (RL)	≥30dB	IEC 61300-3-6
Test Wavelength	850nm	Multi-mode
End face inspection	×400	

3. Packing:1pc/PE BAG+serial number sticker+test report+manual+CPR CE label

ITEM NO.	EAN	Artikel NO.	Length(m)	Package
S217070	4038816116192	207871	10	1pc/PE bag
S217071	4038816116215	207872	20	1pc/PE bag
S217072	4038816116222	207873	30	1pc/PE bag
S217073	4038816116239	207874	40	1pc/PE bag
S217074	4038816116307	207875	50	1pc/Drum
S217075	4038816116406	207876	60	1pc/Drum
S217076	4038816116420	207877	70	1pc/Drum
S217077	4038816116468	207878	80	1pc/Drum
S217078	4038816116482	207879	90	1pc/Drum
S217079	4038816207893	207880	100	1pc/Drum
S217080	4038816116505	207881	110	1pc/Drum
S217081	4038816116512	207882	120	1pc/Drum
S217082	4038816116529	207883	130	1pc/Drum
S217083	4038816116536	207884	140	1pc/Drum
S217084	4038816116543	207885	150	1pc/Drum
S217085	4038816116550	207886	160	1pc/Drum
S217086	4038816116561	207887	170	1pc/Drum
S217087	4038816116604	207888	180	1pc/Drum
S217088	4038816116628	207889	190	1pc/Drum
S217089	4038816207890	207890	200	1pc/Drum

SYNERGY21												
CUSTOMER		ITEM NO.										
Fan	Fan	Add size			2023-9-20	A1	PRODUCT NAME	Universal LC/UPC-LC/UPC OM4 8C 6.0mm, CPR Dca	manufacture country	CHINA	UNIT	MM
BY	CHK	REVISION RECORD MODIFICATIONS			2021-8-30	AO	DRAWNBY	CHECKBY	APPOBY	DATE		
					DATE	REV.	SYNERGY21	SYNERGY21	SYNERGY21	2021-8-30		

Cable cross-section:

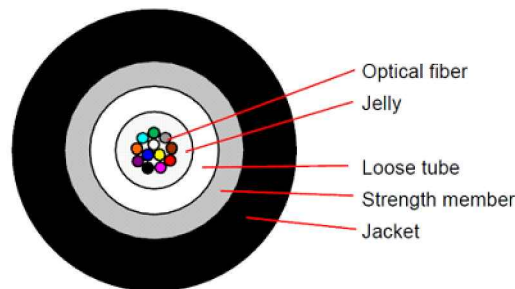

Cable structure and parameter:

Item	Contents	Unit	Value		
Optical Fiber	/	/	4	8	12
	Diameter	mm	3.0±0.1		
Loose tube	Material	/	PBT		
	Filler	/	Jelly		
Strength member	Material	/	Water blocking glass yarn		
	Diameter	mm	6.0±0.2		
Outer jacket	Material	/	LSZH		
	Color	/	Black		
Tensile performance	Short term	N	800		
Crush	Short term	N/100mm	1500		
Cable attenuation		dB/km	≅ 1.0 at 1300nm, ≅ 3.0 at 850nm		
Cable weight (Approx.)		kg/km	40.5		

1. Universal indoor and outdoor cable

- UV resistant IEC 60794-1-22-F14/ISO 4892-3
- Longitudinally waterproof IEC 60794-1-22-F5B, Time:24h H:1m L:<3m
- Anti-rat bite, Yes
- Cable :IEC 60793-2, IEC 11801
- Cable Main mechanical & environmental performance test:IEC 60794-1-2
- LC Connector:IEC 61754-20
- Fiber optic performance standard:IEC 61753-1, IEC 61753-122-2, IEC 61753-222-2
- Halogen free:IEC 60754-1
- Smoke density:IEC 61034-2
- Flame retardant:EN 60332-1-2, EN 50399 of CPR Dca

2. Outer jacket:LSZH, Black

3. Tensile short term:800N

4. Crush short term:1500 N/100mm

5. Min. bending radius

- Static: 10 x cable diameter
- Dynamic: 20 x cable diameter

6. Application temperature range

- Operation: -40°C ~ +70°C
- Installation: -20°C ~ +55°C
- Storage/transportation: -40°C ~ +70°C

OM4 Characteristic of Optical Fiber:

Item	Unit	Specification	
		OM4 [Ⓢ]	
Core diameter [Ⓢ]	μm [Ⓢ]	50±2.5 [Ⓢ]	
Cladding diameter [Ⓢ]	μm [Ⓢ]	124.8± 0.7 [Ⓢ]	
Cladding non-circularity [Ⓢ]	% [Ⓢ]	≤1.0 [Ⓢ]	
Core/Clad concentricity error [Ⓢ]	μm [Ⓢ]	≤1.5 [Ⓢ]	
Coating diameter [Ⓢ]	μm [Ⓢ]	245 ± 10 [Ⓢ]	
Coating/cladding concentricity error [Ⓢ]	μm [Ⓢ]	≤12 [Ⓢ]	
OFL Bandwidth [Ⓢ]	850nm [Ⓢ]	MHz.km [Ⓢ]	≥ 3500 [Ⓢ]
	1300nm [Ⓢ]	MHz.km [Ⓢ]	≥ 500 [Ⓢ]
EMB Bandwidth [Ⓢ]	850nm [Ⓢ]	MHz.km [Ⓢ]	≥ 4700 [Ⓢ]
Attenuation Coefficient [Ⓢ]	850nm [Ⓢ]	dB/km [Ⓢ]	≤2.4 [Ⓢ]
	1300nm [Ⓢ]	dB/km [Ⓢ]	≤0.6 [Ⓢ]
Macro-bend loss (100turn, 75mm radius) [Ⓢ]	850nm [Ⓢ]	dB [Ⓢ]	≤0.5 [Ⓢ]
	1300nm [Ⓢ]	dB [Ⓢ]	≤0.5 [Ⓢ]
Proof stress level [Ⓢ]		kpsi [Ⓢ]	100 [Ⓢ]
Effective group index of refraction [Ⓢ]	850nm [Ⓢ]	/ [Ⓢ]	1.483 [Ⓢ]
	1300nm [Ⓢ]	/ [Ⓢ]	1.478 [Ⓢ]
Zero dispersion wavelength λ ₀ [Ⓢ]		nm [Ⓢ]	1295 ≅ λ ₀ ≅ 1340 [Ⓢ]

				CUSTOMER	SYNERGY21		ITEM NO.			
				PRODUCT NAME	Universal LC/UPC-LC/UPC OM4 8C 6.0mm,CPR Dca		manufacture country	CHINA	UNIT	MM
NEW				2021-8-30	A	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.	SYNERGY21	SYNERGY21	SYNERGY21	2021-8-30	


Kurzanleitung

Demontage des Gewebeschauchs


SYNERGY 21



1 Leichtes zurückschieben des Gewebeschauches

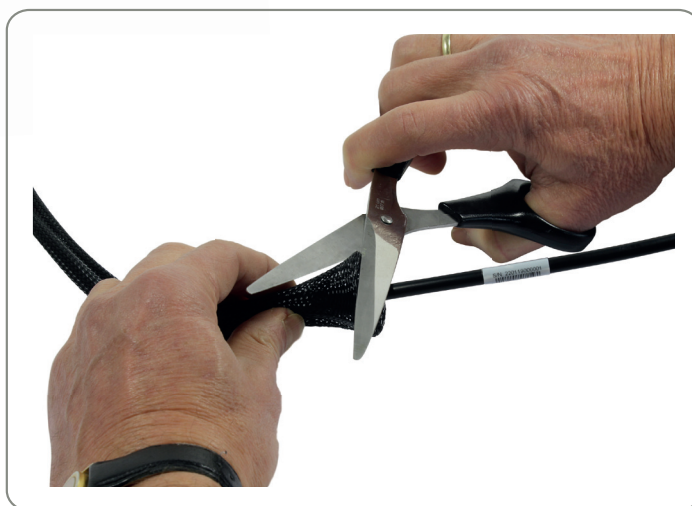

2 Abschneiden des Gewebeschauchs
Wichtig: Keine LWL-Faser beschädigen

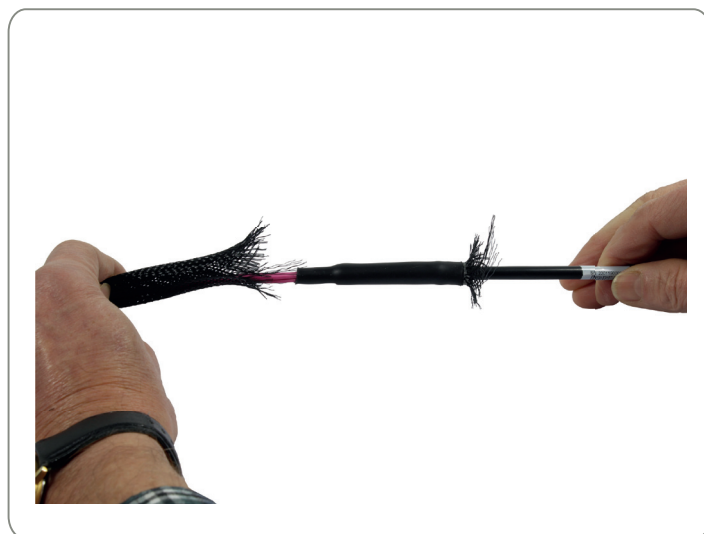

3 Abziehen der Gewebeschauch-Einziehhilfe

