ALLNET MSR Vibration Alarm ALL3044

>>> Go to the shop article
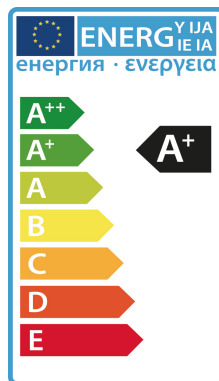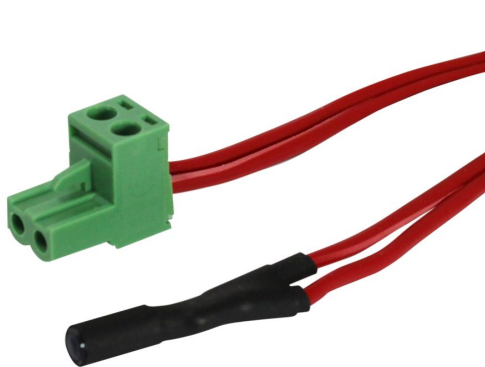
kwh/1000h:	20,00
Lumens:	2100
Watt:	20,0
Nominal Service Life:	0 Std.
Switching Cycles:	0
Opt. Ambient Temperature.:	0 °C

EAN CODE

4 0 3 8 8 1 6 0 7 9 1 4 5
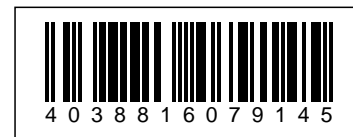
The shock sensor must be connected to the contact input with pulse stretching such as ALL3542/ALL4442.

The sensor sends a pulse as soon as a vibration is detected. In addition, this sensor is more sensitive than the ALL3043.

Accessories

Part No.	Name
106665	ALLNET ALL3542 / 8 port contact input for DIN rail
98836	ALLNET ALL4442 / contact input 4-port in metal case
134571	ALLNET ALL3419 / IP Building-Autom. 3x I2C, 1x USB, LAN/WLAN
98686	ALLNET MSR control center "ALL3500v2" incl. 4 sensor ports & WLAN for IP building automation
101636	ALLNET ALL3500PoE / IP Homeautomation Appliance
101241	ALLNET ALL3692 / Smart-Meter-Gateway PM3 4x D0 Connectors

www.allnet.de

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22
Errors and technical changes that serve the interests of progress or development of the product, are reserved.
Page 1/1