


## Synergy 21 LED Flex Strip 60 red DC12V 24W IP68



kwh/1000h:	24,00
Lumens:	2025
Watt:	24,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature..	25 °C

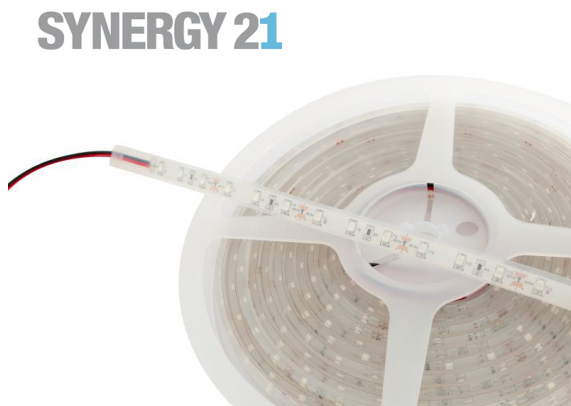

### Synergy 21 LED Flex Strip red DC12V 24W IP68

Voltage: 12V, max.2A

Watt: 24W±10%

Light colour: red

Beam angle: 120°

Protection class: IP68

Number of LEDs: 300\*3528SMD

Dimensions: 5000\*8\*3 mm

PCB colour: white, open cable end

Operating temperature: -25°C to +40°C

Weight: 0.090 kg

Can be shortened every 3 LEDs

Adhesive tape: yes 3M on the back

kWh/1000h: 24

Strip can be shortened at the cut marks with sharp scissors.

!Attention! Strip must first be checked for functionality.

Only split strip when no current is present.

Our 3M adhesive tape adheres well, but should only be used as a mounting aid.

There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.  
Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.  
No guarantee can be given for overheated LED strips

## Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	2
CC oder CV:	CV
Dimmbar:	abhängig vom Netzteil
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	8
LED Strip Höhe:	3
LED Strip Klebeband:	ja
LED Strip kürzbar:	50
LED Strip Länge:	5000
Lichtfarbe:	rot
Lichtfarbe Name:	rot
Schutzklasse:	IP68
Volt:	12
Weight:	0.4 Kg
Warranty:	24.00 Months

## Additional Images



**SYNERGY 21**

## Accessories

Part No.	Name
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
139522	Mean Well power supply - 12V 120W IP67