


NOTE:


1. Electrical test:

- (1).100% open short & miss wire test;
 - (2). Insulation resistance:DC 300V 10M ohm;
 - (3).Contactor resistance:3 ohm;
 - (4). Dielectric strength:150V AC/Sec, 1mA.
 - (5). Displayport practical application Test Pass
2. PACKING: 1PCS/SYNERGY 21 PE BAG+LABEL
3. ROHS COMPLIANT
4. PRINT WORD: DisplayPort Cable E119932-T 兄 AWMM
- STYLE 20276 80°C 30V VW-1 Copartner

⑬	PE BAG	SYNERGY 21 SLIP PE BAG	1	
⑫	LABEL	NO DRY GLUE LABEL	1	
⑪	MINI TIE	WHITE	2	
⑩	DUST CAP	MINI DP 20PIN MALE LDPE	1	
⑨	DUST CAP	DP 20PIN MALE LDPE	1	
⑧	MOLDED	45P WHITE PVC	2	
⑦	INTER MOLD	LDPE	2	
⑥	OUTER COVER	DP 20PIN MALE CONNECTOR WHITE ABS Assembly TYPE OUTER COVER	1	
⑤	TUBE	Φ0.8*10 HEAT SHRINK TUBE	7	
④	TUBE	Φ2.0*5 HEAT SHRINK TUBE	10	
③	CONNECTOR	MINI DP 20P/M SOLDER TYPE, BLACK INSULATION , THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED	1	
②	CONNECTOR	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION , THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED	1	
①	CABEL.	32AWG(7/0.08TC*1P+7/0.08TC+FAM)*5PCS+7/0.08TC*5C+AL-F10L+7/0.08TC+BRAID 16/5/0.12 AL-MG WHITE PVC OD5.5MM±0.2	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION		
			QT'Y	REMARK
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

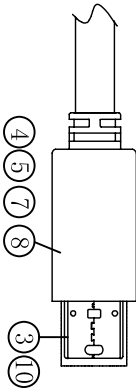

PIN OUT

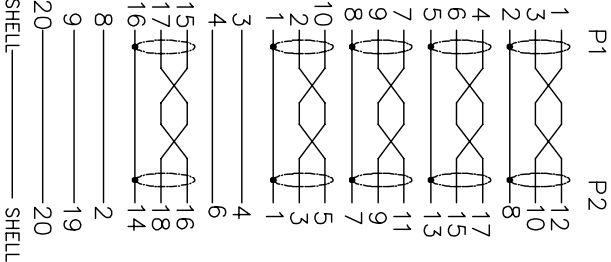

SYNERGY 21

CUSTOMER		ITEM NO.		S216373	
PRODUCT NAME	DP/M to MINI DP/M	MANUFACTURE COUNTRY:	CHINA	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE		
SYNERGY 21	SYNERGY 21	SYNERGY 21	2012.08.14		

