


## ALLNET Switch full managed 16 Port Gigabit / 16x LAN / 2x SFP / Fanless / 19" / "ALL-SG8618M"

>>> [Vers l'article de la boutique en ligne](#)



### EAN CODE

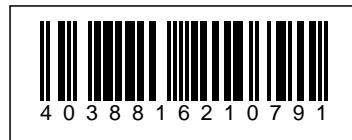


### Highlights:

- 16 port Gigabit Layer2+ full managed switch architecture.
- Supports NWay protocol for speed (10/100/1000Mbps) and duplex mode (half/full) auto-detection
- Supports back-pressure (half duplex), flow control (IEEE 802.3x and IEEE 802.3az Energy Efficient Ethernet)
- VLAN 4K Static / Port-Based / Tagged Based / Protocol / Voice VLAN / 802.1ad Q-in-Q
- Link Aggregation static link / LACP / Algorithm MAC based or IP based
- IGMP Snooping 256 groups IGMP v1/v2/v3, Fast Leave
- QoS (QoS>QoS multi-label, queue config, QoS mapping)
- Stormcontrol
- Total fanless, no more annoying noises...
- 19 "inch angle or wall/table mounting possible

ALL-SG8618M is a 16\* 10/100/1000M RJ45 ports and 2\*100/1000M SFP fiber slot ports L2+ managed Ethernet fiber switch , built-in 35W power supply. Support 1U/19 inch rack installation. It is programmed for advanced switch management functions such as **802.1Q VLAN** and **Q-in-Q VLAN**, **Multiple Spanning Tree protocol (MSTP)**, **loop** and **BPDU guard**, **IGMP snooping**, and **MLD snooping**. Also, the **Link Layer Discovery Protocol (LLDP)** is the Layer 2 protocol included to help discover basic information about neighboring devices on the local broadcast domain. It provides a quick, safe and cost-effective Ethernet network solution for small businesses and enterprises.

### Solution for IPv6 Networking

With the IPv6/IPv4 dual stack and other management functions, ALL-SG8618M is the best choice for IP CCTV surveillance, VoIP and wireless solution providers to develop the IPv6 network. Meanwhile they help the SMBs to upgrade their network infrastructures to the IPv6 era without any extra investment.

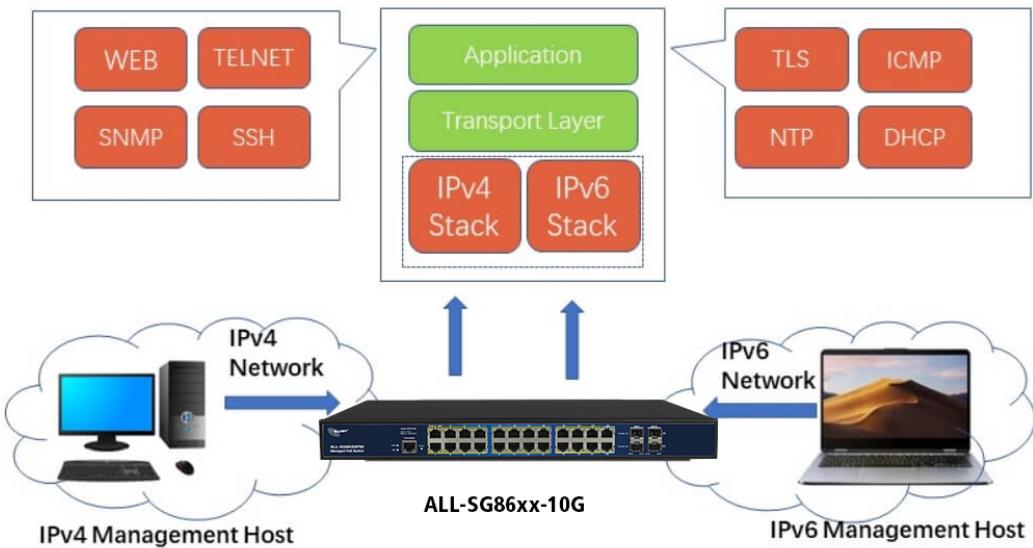

### Robust Layer 2 Features

ALL-SG8618M can be programmed for advanced Ethernet fiber switch management functions, such as port aggregation, Q-in-Q VLAN, Spanning Tree Protocol, QoS, bandwidth control, ERPS IGMP/MLD snooping etc. The ALL-SG86xx series allows the operation of a high-speed trunk combining multiple ports.

### Powerful Security Functions

ALL-SG8618M provides a comprehensive access control list (ACL) for enforcing security to the edge. It can be used to restrict to network access by denying packets based on source and destination IP address, TCP/UDP port number or defined typical network applications. Its protection mechanism also comprises 802.1x Port-based and MAC-based user and device authentication. With the private VLAN function, communication between edge ports can be prevented to ensure user privacy.

### Enhanced Security and Traffic Control

ALL-SG8618M supports DHCP Snooping, IP Source Guard and Dynamic ARP Inspection functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.

### User-friendly Secure Management


For efficient management, ALL-SG8618M is a managed switch, equipped with console, web and SNMP management interfaces. With management interface, ALL-SG8618M offers an easy-to-use, platform independent management and configuration facility. ALL-SG8618M supports SNMP and it can be managed via any management software based on the standard SNMP v1 or v2 Protocol. Meanwhile ALL-SG8618M offers Cisco-like command via Telnet or console port and customer doesn't need to learn new command from these switches. Moreover, ALL-SG8618M offers the remotely secure management by supporting SSH, SSL and SNMP v3 connection where the packet content can be encrypted at each session.

### Intelligent SFP DDM Function

ALL-SG8618M support SFP-DDM (Digital Diagnostic Monitor) function that greatly helps network administrator to easily monitor real-time parameters of the SFP and SFP+ transceivers, such as optical output power, optical input

power, temperature, laser bias current, and transceiver supply voltage.


### Digital Diagnostic Monitor (DDM)

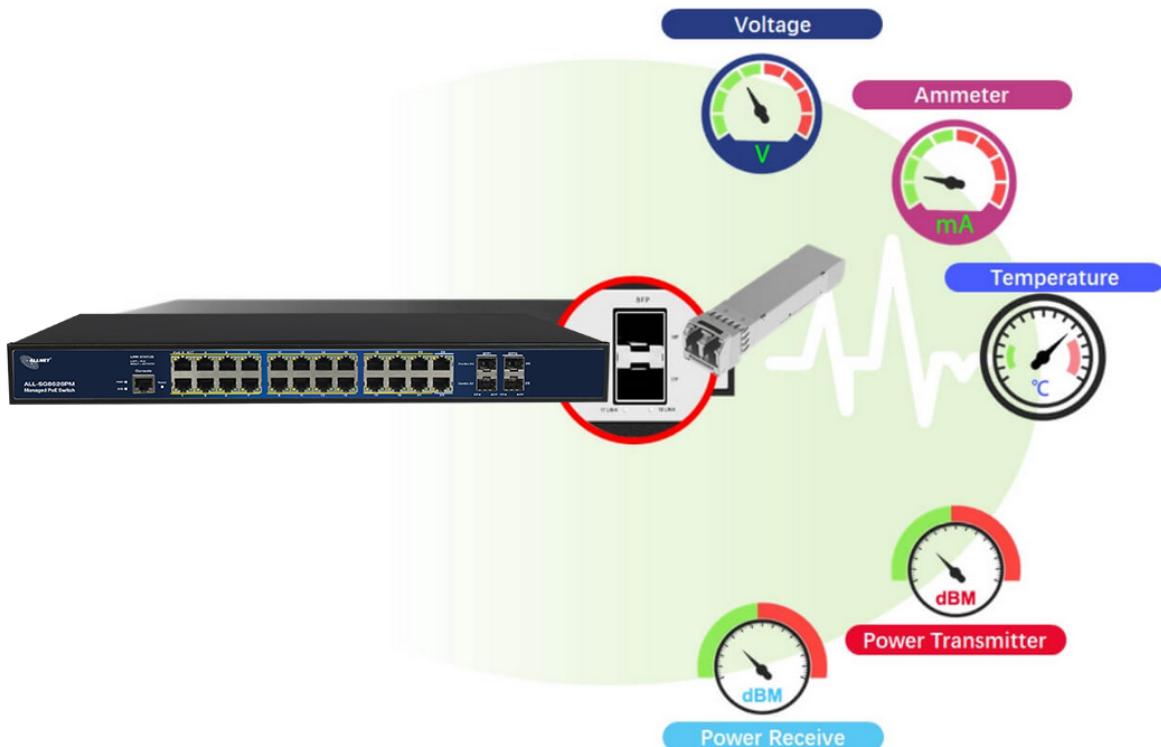

### Fast Recovery Redundant Ring for Critical Network Applications

The ALL-SG8618M supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced ITU-T G.8032 ERPS technology, Spanning Tree Protocol (802.1s MSTP), and redundant power input system into customer's industrial automation network to enhance system reliability and uptime in harsh factory environments. In a certain simple Ring network, the recovery time of data link can be as fast as 20ms.

## *ERPS Ring for Video Transmission Redundancy*

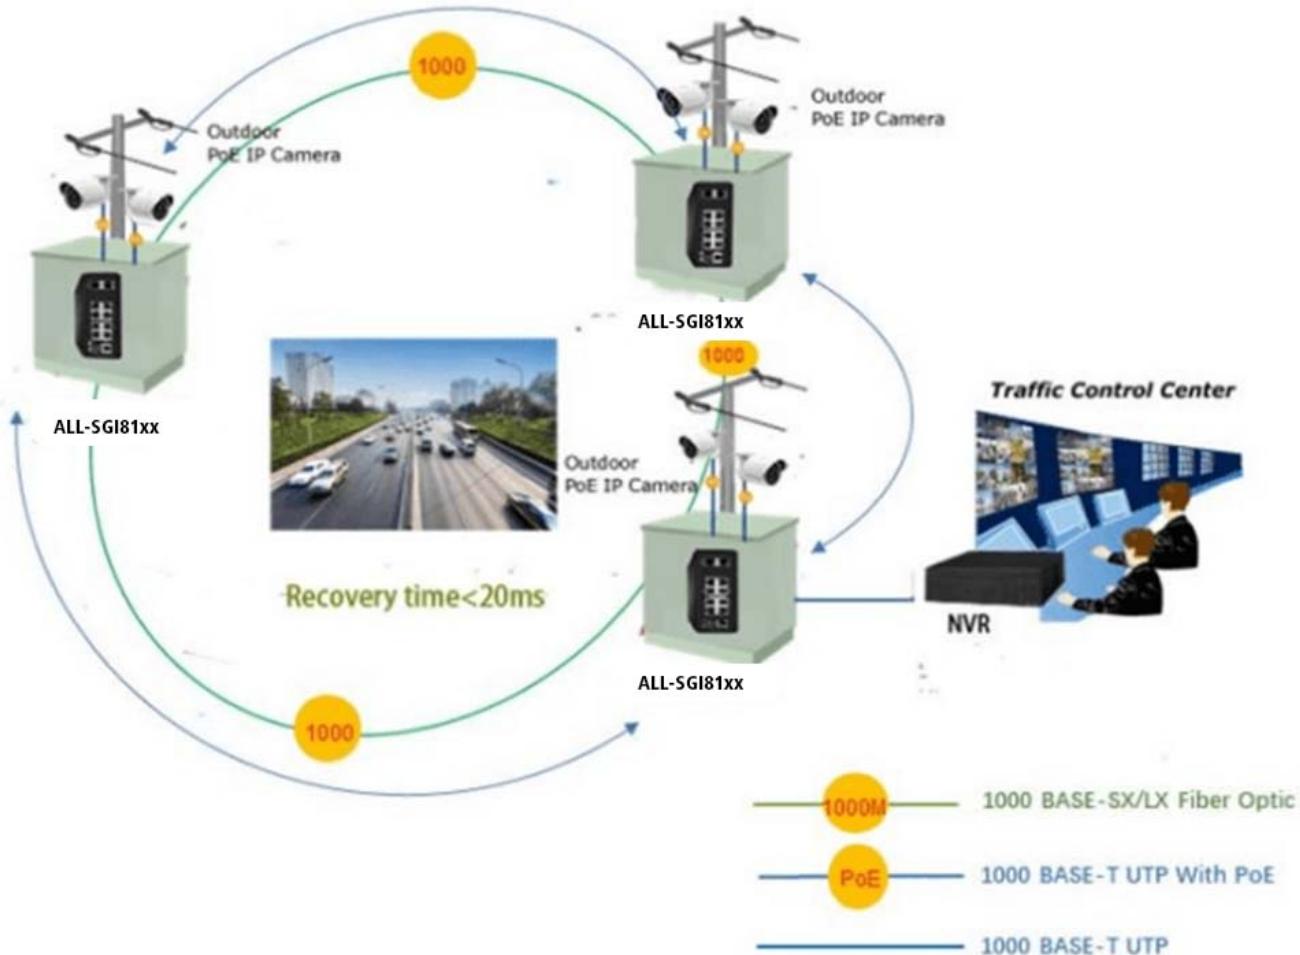

### Technical Details:

Model	ALL-SG8618M
Copper Ports	16 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
Fiber Ports	2-100/1000BASE-X SFP interfaces, supports 100/1000Mbps dual mode
Console Ports	1 x RS-232-to-RJ45 serial port (115200, 8, N, 1)
Switch Architecture	Store-and-Forward
Switch Fabric	36Gbps/non-blocking
Throughput	23.819Mpps @64 bytes
Address Table	8K entries
Share Data Buffer	4.0 Mb
Jumbo Frame	9600 Bytes



SDRAM	1Gb
Flash Memory	128Mb
Flow Control	IEEE 802.3x pause frame for full-duplex, Back pressure for half-duplex
Reset Button	> 2 sec: Factory default and reset
Power Supply	100~240V AC, 50/60Hz, 4A (max.)
Power Consumption	12V, 45watts/1122 BTU
LED Indicators	Power: Green  Solid on- power work normal, off- power disconnected  System: Green  Blink-work normally, solid on- soft work abnormal, fast Blink- soft upgrade  10/100/1000T RJ45 Interfaces (Port 1 to Port 16): 1000 LNK/ACT (Green), 10/100 LNK/ACT (yellow)  Blink- port connected with data transmission; Solid on- port connected without data transmission  100/1000Mbps SFP Interfaces (Port 17 to Port 18): Green  Blink- port connected with data transmission; Solid on- port connected without data transmission
EMC	Surge Immunity: IEC61000-4-5  ESD Protection: ESD IEC61000-4-2: EFT IEC61000-4-4
Dimension	440x240x44.5mm
Weight	3.2kg
Working Temperature	-10°C to 45°C
Storage Temperature	-20°C to 70°C
MTBF	50,000hrs

## Layer 2 functions

Port configuration	Auto-negotiation  Flow Control  Port Mirror: TX/RX/BOTH; Many-to-1 monitor
--------------------	--



	CPU Mirror  Traffic statistics
Link Aggregation	Static link aggregation  LACP(Dynamic Trunk/Static Trunk)  Algorithm based on Source/Destination MAC  Algorithm based on Source/Destination IP
MAC Table	Aging Time  Static MAC address  Dynamic MAC address management
VLAN	4094 Active VLANs  4094 VID  802.1Q Tag VLAN  Port VLAN  Protocol VLAN  MAC VLAN  Voice VLAN  802.1ad Q-in-Q tunneling  Private VLAN (Protected port)  GARP/GVRP
ACL	256ACLs  L2, L3 e L4  Time-based ACL  IP ACL  MAC ACL  MAC-IP ACL  User-Defined ACL



	ICMPv6
Spanning tree	802.1D Spanning Tree Protocol (STP) 802.1w Rapid Spanning Tree Protocol (RSTP) 802.1s Multiple Spanning Tree Protocol (MSTP) Loop Guard Root Guard TC-BPDU Guard BPDU Guard BPDU Filter
Ring Protection	<20ms G.8032 ERPS Ring Fast Ring
Multicast	256 groups IGMP v1/v2/v3 Snooping, Fast Leave MLD Snooping Multicast VLAN IGMP filter MVR Multicast Routing
QOS	8 mapping IDs to 8 level priority queues CoS port-based CoS 802.1p-based CoS DSCP-based Scheduling algorithms SP, WRR, SP+WRR Storm Control (Broadcast, Multicast, Unknown Unicast) Bandwidth control per port SWRR, DWRR for Scheduling



	Flow Redirect  Precedence  TOS  Rate Limiting(Ingress/Egress)  Stri Priority
Security Features	Port Security  MAC address filter  ARP Association (Manual, ARP scanning, DHCP snooping)  ARP Protection  AAA  DAI  DoS (Denial of Service)  Classification of packages based on: End.MAC, IP End, TCP / UDP Ports,  Protocol Type;  802.1x Authentication (port-based e MAC-based)  TACACS/TACACS+ Authentication  RADIUS Authentication  DHCP Filter  Guest VLAN  SSLv2/SSLv3/TLSv1  SSHv1/SSHv2  Restriction of WEB access based on: IP Address, And. MAC and Port;  Port Isolation  Loopback detection



No. d'article: 210793  
Numéro de fabricant: ALL-SG8618M

Management	SNMP v1/v2c/v3 with Full Private MIBs  RMON 4 groups  WEB (HTTP/HTTPS)  CLI (Telnet, Console, SSHv1/v2)  Firmware upgrade via console/web/TFTP  Configuration Backup/Reload  Dual Firmware  LLDP  Configuration Export/Import  CDP Aware  OAM (IEEE802.3ah)  CFM (IEEE802.1ag)  SFlow  Telnet client
Other Features	DNS Client  DHCP Relay  DHCP Client  DHCP Snooping  DHCP Option 66  DHCP Option 67  DHCP Option 82  NTP/SNTP Client  UPNP  UDLD
Maintenance	Cable Diagnostics

Ping
SFP DDM (Digital Diagnostics Monitoring)
Thermal protection
System log (Local and Remote)
Memory and CPU Monitoring
Tracert /Tracert 6

## Layer 3 functions

Static Routing	IPv4 Unicast: Static Routing(Software Base)  IPv6 Unicast: Static Routing(Software Base)
IPV6	IPv6 neighbor discovery (ND)  Path maximum transmission unit (MTU) discovery  Internet Control Message Protocol (ICMP) version 6  TCPv6/UDPV6  Ping6  Telnet(v6)  Http/Https  Interface IPV6  ACL IPV6

## Attributs

Attribut	Valeur
Anzahl Ports PoE/LAN:	0/16
Belüftung Switch:	Lüfterlos
Einsatzort Switch:	19"
Management:	full managed
SFP Geschwindigkeit:	SFP 1GBit

Attribut	Valeur
Poids:	4 Kg
Garantie:	24.00 Mois

## Accessoires

No. d'article	Désignation
75932	Patchkabel RJ45 FTP(F/UTP) 0,25m grau, CAT5e, Synergy 21,
75939	Patchkabel RJ45 FTP(F/UTP) 0,5m grau, CAT5e, Synergy 21,
75946	Patchkabel RJ45 FTP(F/UTP) 1,0m grau, CAT5e, Synergy 21,
75959	Patchkabel RJ45 FTP(F/UTP) 2m grau, CAT5e, Synergy 21,
75966	Patchkabel RJ45 FTP 3m grau, CAT5e, Synergy 21,
75973	Patchkabel RJ45 FTP(F/UTP) 5m grau, CAT5e, Synergy 21,
75979	Patchkabel RJ45 FTP(F/UTP) 7,5m grau, CAT5e, Synergy 21,
75986	Patchkabel RJ45 FTP(F/UTP) 10m grau, CAT5e, Synergy 21,
76091	Patchkabel RJ45, 15m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76029	Patchkabel RJ45, 0,25m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76036	Patchkabel RJ45, 0,5m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76043	Patchkabel RJ45, 1,0m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76056	Patchkabel RJ45, 2m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76063	Patchkabel RJ45, 3m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76070	Patchkabel RJ45, 5m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76077	Patchkabel RJ45, 7,5m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76084	Patchkabel RJ45, 10m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76091	Patchkabel RJ45, 15m grau, CAT5e, S-FTP(SF/UTP), Synergy 21,
76117	RJ45, CAT6 250Mhz, 0,25m gris, S-STP(S/FTP)
76124	Cordon RJ45, CAT6 250Mhz, 1,0m gris, S-STP
76133	Cordon RJ45, CAT6 250Mhz, 1,0m gris, S-STP
76151	Cordon RJ45, CAT6 250Mhz, 2m gris, S-STP
76160	Cordon RJ45, CAT6 250Mhz, 3m gris, S-STP
76169	Cordon RJ45, CAT6 250Mhz, 5m gris, S-STP
76178	Cordon RJ45, CAT6 250Mhz, 7,5m gris, S-STP (S/FTP)



No. d'article: 210793  
Numéro de fabricant: ALL-SG8618M

No. d'article	Désignation
76187	Cordon RJ45, CAT6 250Mhz,10m gris, S-STP (S/FTP)
76196	Cordon RJ45, CAT6 250Mhz,15m gris, S-STP (S/FTP)
140955	TP(RJ45) POE-Tester, at/af, Endspan/Midspan, standard, Synergy 21,
141255	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Kaltgeräte IEC-C13(Buchse), 1m,Black IEC Lock
141254	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Kaltgeräte IEC-C13(Buchse), 2m,Black IEC Lock
141256	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Kaltgeräte IEC-C13(Buchse), 3m,Black IEC Lock
188424	CyberPower USV, OR-Serie, 600VA/360W, Line-Interactive, LCD, 19"/1HE, USB/RS232, IEC C13 Kaltgeräte,
188433	CyberPower USV, OR-Serie, 650VA/360W, Line-Interactive, LCD, 19"/1HE, USB/RS232, CEE7-Schutzkontakt,
188435	CyberPower USV, OR-Serie, 1000VA/600W, Line-Interactive, LCD, 19"/1HE, USB/RS232, IEC C13 Kaltgeräte
188439	CyberPower USV, OR-Serie, 1500VA/900W, Line-Interactive, LCD, 19"/1HE, USB/RS232, IEC C13 Kaltgeräte